


MP63/HMP113

Wiring / Verdrahtung / Câblage / 配線 / 接线



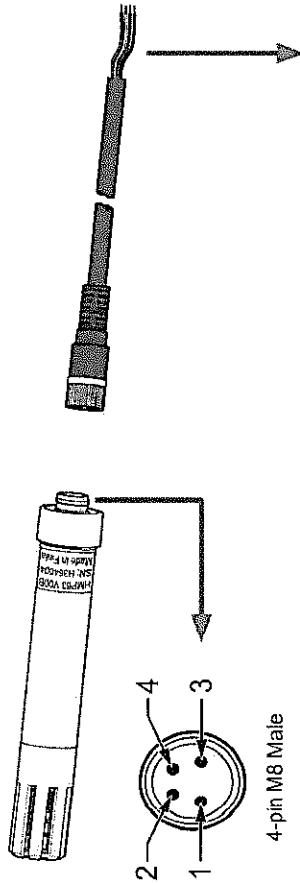

5 ... 28 VDC (V_{out} 0 ... 1 / 0 ... 2.5 V)
8 ... 28 VDC (V_{out} 0 ... 5 / 1 ... 5 V)


Channel 1: RH / Td / T
0 ... 1 / 2.5 / 5 V, 1 ... 5 V
RS485: - / B

GND / AGND

Channel 2: RH / Td / T
0 ... 1 / 2.5 / 5 V, 1 ... 5 V
RS485: + / A


 Brown / Braun / Marron / 茶 / 褐

 White / Weiß / Blanc / 白 / 白


 Blue / Blau / Bleu / 青 / 蓝

 Black / Schwarz / Noir / 黑 / 黑

Dimensions / Abmessungen / Dimensions / 寸法 / 尺寸

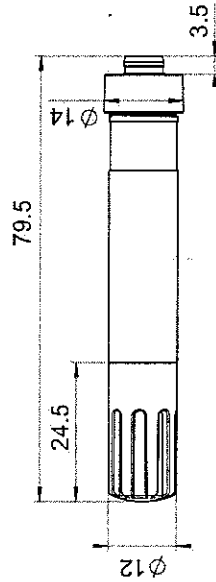

HMP110REF (Constant Output Probe)


 HMP110REF is a validation tool that outputs constant digital humidity and temperature readings. It does not have any sensors, and it does not measure. The output is defined when ordering from Vaisala.

Order Code: HMP110REF

Relative Humidity → → → → → Temperature

A	0 %RH	0	-40 °C
B	50 %RH	1	20 °C
C	100 %RH	2	60 °C
X	Custom	X	Custom

Wiring / Verdrahtung / Câblage / 配線 / 接线

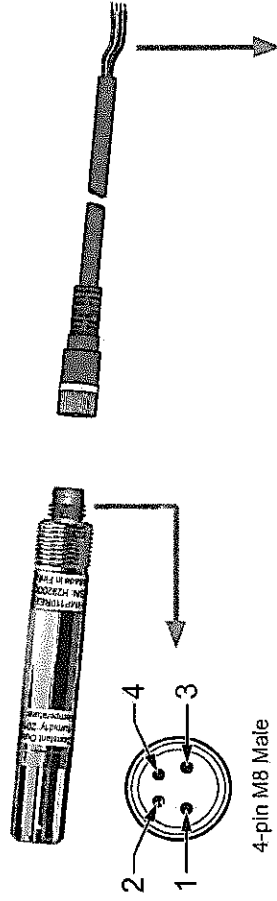


4-pin M8 Male


1 5 ... 28 VDC


2 RS485: - / B


3 GND

4 RS485: + / A

 Brown / Braun / Marron / 茶 / 褐

 White / Weiß / Blanc / 白 / 白

 Blue / Blau / Bleu / 青 / 蓝

 Black / Schwarz / Noir / 黑 / 黑

Dimensions / Abmessungen / Dimensions / 寸法 / 尺寸

